

Burners

CODE 17310010

TBG 60 MC 50HZ



Gas burner compliant with European standard EN676. Mechanical operation at two progressive stages.

Continuous modulation operation by installing P.I.D. controller in the control panel (to be ordered separately with modulation probe).

Modulation ratio 1:5.

Gas burner with low NO_x and CO emissions in accordance with European standard EN676: class 3.

Regulating combustion air and blast-pipe.

Combustion air intake with throttle damper. Air flow adjustment with mechanical cam.

Fully closing air damper on shutdown to avoid loss of heat through the chimney.

Maintenance facilitated by the possibility of removing the combustion head without having to remove the burner from the boiler.

Sliding boiler coupling flange to adapt the blast-pipe to the various types of boilers.

CE version gas train is complete with butterfly valve, operation and safety valve with electromagnetic drive, minimum pressure switch, pressure regulator and gas filter.

Possibility to choose gas train with valve tightness control.

Fail proof connectors for burner/gas train connection

Gas train exit: low.


Flame detection by ionisation electrode with connector for micro amp meter.

7-pole socket for burner electric and thermostatic supply.

4-pole socket for second stage control or for the connection of the PID electronic regulator.

Electric protection rating:

Operating range

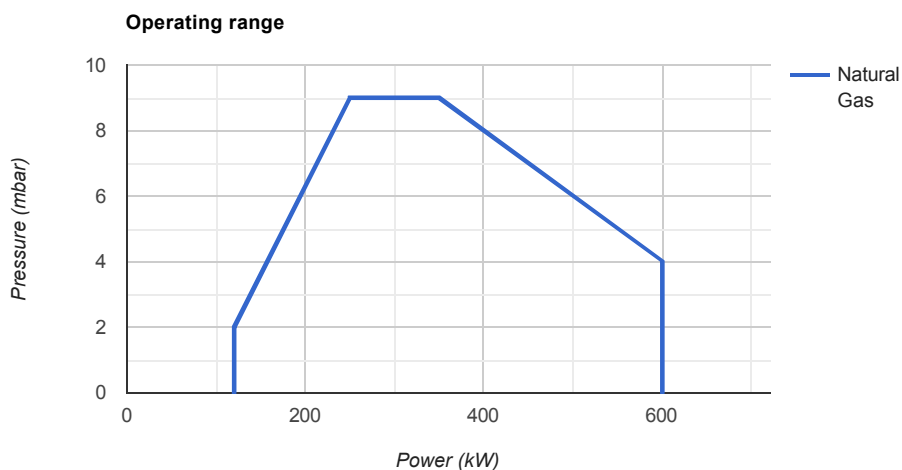

Technical data

Tipo articolo	Gas burner compliant with European standard EN676. Mechanical operation at two progressive stages.
Funzionamento modulante	Continuous modulation operation by installing P.I.D. controller in the control panel (to be ordered separately with modulation probe).
Rapporto Modulazione	Modulation ratio 1:5.
Emissioni Lato Gas	Gas burner with low NOx and CO emissions in accordance with European standard EN676: class 3.
Regolazione aria e testa	Regulating combustion air and blast-pipe.
Regolazione aria	Combustion air intake with throttle damper. Air flow adjustment with mechanical cam.
Chiusura aria	Fully closing air damper on shutdown to avoid loss of heat through the chimney.
Fuel	Metano
Operation	Modulante Meccanico
Minimum Thermal Power (kW) to ErP	120
Maximum Thermal Power (kW) to ErP	600
Min flow rate (Sm ³ /H)	13
Max flow rate (Sm ³ /H)	63
Manutenzione facilitata	Maintenance facilitated by the possibility of removing the combustion head without having to remove the burner from the boiler.
Flangia	Sliding boiler coupling flange to adapt the blast-pipe to the various types of boilers.
Gas Train	CE version gas train is complete with butterfly valve, operation and safety valve with electromagnetic drive, minimum pressure switch, pressure regulator and gas filter.
Kit CTV	Possibility to choose gas train with valve tightness control.
Connettore rampa gas	Fail proof connectors for burner/gas train connection
Uscita della rampa gas	Gas train exit: low.
Controllo fiamma	Flame detection by ionisation electrode with connector for micro amp meter.
	7-pole socket for burner electric and thermostatic supply.
Presse 4 poli	4-pole socket for second stage control or for the connection of the PID electronic regulator.
Protezione elettrica	Electric protection rating:
Electric power supply type	AC
No. of Phases	3N
Power Supply Voltage (V)	400
Power Supply Frequency (Hz)	50
Fan Motor Power (kW)	0.75
Weight without packaging (kg)	35
Weight with packaging (kg)	51
Width (mm)	1070
Depth (mm)	800
Height (mm)	700