

Burners

CODE 2131010

BT 300 DSN 4T 50HZ



Fuel oil burner. Two-stage operation.

Regulating combustion air and blast-pipe.

Combustion air intake with throttle damper. Air flow adjustment with electric servomotor.

Fully closing air damper on shutdown to avoid loss of heat through the chimney.

Maintenance facilitated by the possibility of removing the combustion head without having to remove the burner from the boiler.

Sliding boiler coupling flange to adapt the blast-pipe to the various types of boilers.

Fuel supply circuit made of gear pump with pressure adjustment and shut-off valves

Electric fuel preheater with antigas valve, filter, thermometer, adjustment, minimum and safety thermostats.

Atomisation unit with nozzle-closing pin.


Flame detection by photoresistance.

Terminal board for the electric and thermostatic connections to the burner.

Terminal board for second stage operation

Electric protection rating:

Operating range

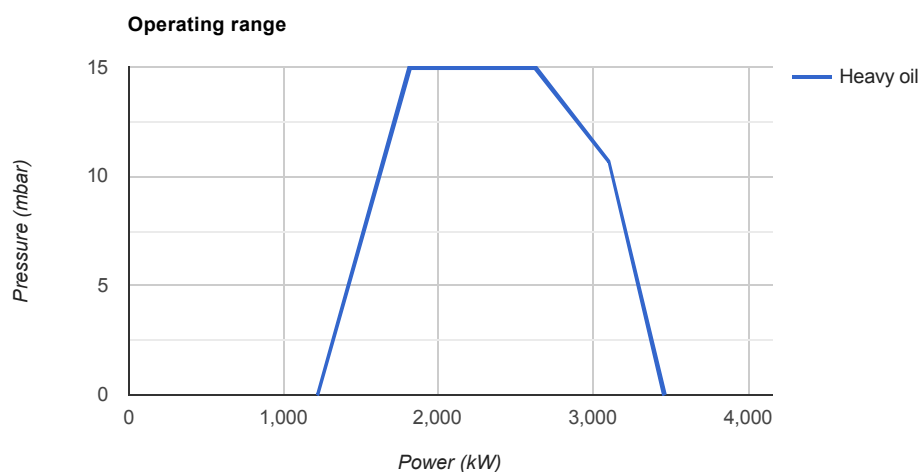

Technical data

Tipo articolo	Fuel oil burner. Two-stage operation.
Regolazione aria e testa	Regulating combustion air and blast-pipe.
Regolazione aria	Combustion air intake with throttle damper. Air flow adjustment with electric servomotor.
	Fully closing air damper on shutdown to avoid loss of heat

	through the chimney.
Fuel	Olio Combustibile
Operation	Bistadio
Minimum Thermal Power (kW) to ErP	1220
Maximum Thermal Power (kW) to ErP	3460
Manutenzione facilitata	Maintenance facilitated by the possibility of removing the combustion head without having to remove the burner from the boiler.
Min flow rate (kg/h)	109
Max flow rate (kg/h)	310
Max Viscosity (°E)	7
Flangia	Sliding boiler coupling flange to adapt the blast-pipe to the various types of boilers.
Circuito combustibile	Fuel supply circuit made of gear pump with pressure adjustment and shut-off valves
Preriscaldatore	Electric fuel preheater with antigas valve, filter, thermometer, adjustment, minimum and safety thermostats.
Gruppo polverizzatore	Atomisation unit with nozzle-closing pin.
Controllo fiamma	Flame detection by photoresistance.
Morsettiera	Terminal board for the electric and thermostatic connections to the burner.
Morsettiera	Terminal board for second stage operation
Protezione elettrica	Electric protection rating:
Electric power supply type	AC
No. of Phases	3N
Power Supply Voltage (V)	400
Power Supply Frequency (Hz)	50
Fan Motor Power (kW)	7,5
Weight without packaging (kg)	260
Weight with packaging (kg)	350
Width (mm)	2260
Depth (mm)	1520
Height (mm)	1150